




# UNIVERSAL STEALTHPRO KEYBOARD FOLIO



## INSTRUCTION MANUAL

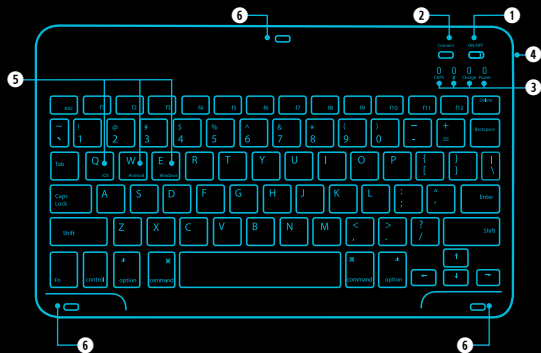

## KEY

- ❶ On/Off switch
- ❷ Bluetooth Connect Button
- ❸ LED Indicators
- ❹ Micro USB Port
- ❺ Operating System Toggle Keys  
(flashes when searching)
- ❻ Foam Screen Protectors

## 3 EASY STEPS

1. Wrap the silicone mount around the device corners for installation.
2. Easily position or remove magnetic keyboard for desired viewing angle  
Tablet and case can be used separately.
3. Connect *Bluetooth*® keyboard to your device.

## PRODUCT FEATURES

- Built-in wireless *Bluetooth*® 3.0 keyboard
- Compatible across iOS, Android, and Windows, enabling you to mix and match with devices
- Ultra-thin, lightweight aluminum keyboard.
- Quiet key design
- Micro USB interface for convenient charging
- Moisture resistant and dust-proof keyboard design
- Energy-saving keyboard with self-activating sleep mode

## KEYBOARD SPECIFICATION

### Bluetooth Specification:

*Bluetooth*® 3.0 interface standard

**Operating Range:** Up to 10 meters

### Modulating System:

Gaussian Frequency-Shift Keying (GFSK)

**Operation Voltage:** 3.0-4.2V

**Operation Current:** < 2.5mA

**Standby Current:** < 0.3mA

**Sleeping Current:** < 40UA

**Charging Current:** ≥ 200mA

**Standby Time:** 100 days

**Charging Time:** < 2hours

**Lithium Battery Capacity:** 280mA

**Uninterrupted working time:** 100 hours

**Lithium Battery Life:** 3 years

**Lithium Battery Specification:**

3.8\*20\*35mm

**Keystroke Strength:** 80±10g

**Keystroke life:** 5 million strokes

**Operation Temperature:** -10±55 C

## PAIRING INSTRUCTIONS (PAIR TO IPAD AS EXAMPLE)

1. Turn on the power toggle switch. The [Power] and [⚡] indicator light will be on for 5 seconds and then go off.
2. Press on the [Connect] button, the indicator light [⌘] will blink. The keyboard is now ready to connect to your device.
3. Turn on and unlock iPad. Click on the iPad [Settings] icon.
4. On the setting menu, select item [General] to access [Bluetooth] turn on the connection. iPad will automatically search for a *Bluetooth*-enabled device.
5. Once the *Bluetooth* 3.0 keyboard has been identified, click on *Bluetooth* 3.0 keyboard to connect to your device.
6. Enter the random four digit password code as displayed on the screen on the keyboard and hit enter.
7. Once the *Bluetooth* keyboard has successfully connected to your device, the indicator light [status] will be off.

## OPERATING SYSTEM INSTRUCTIONS

1. The default mode is for the iOS system. If you need to use it for android or Windows, please shift it by pressing Fn key and W key for Android (or E key for Windows) together before you start to type.
2. Please make sure your Android or Windows device is equipped with a *Bluetooth* HID profile before pairing.

## CHARGING INSTRUCTIONS

When the battery power is low, the indicator light [power] will start blinking. This means that it is time to recharge the keyboard.

1. Connect the micro end of the USB power cable to the micro USB port on the keyboard.

2. Connect the other end of the cable to a wall plug power adapter or computer USB interface.
3. The indicator light [charge] will stay on red while the keyboard is charging. Once it is fully charged, the power indicator light will shut off.

## THE POWER SAVING MODE

The keyboard will enter sleep mode after being idle for 15 minutes. To activate it from sleep mode, press any key and wait 3 seconds.

## TROUBLESHOOTING

### Unable to connect

1. Check whether the power switch is on or not.
2. Verify that the keyboard is within the operating distance (the available distance is 10 meters).
3. Make sure the battery is not depleted.
4. Ensure your device's *Bluetooth* function is turned on.
5. Confirm the *Bluetooth* keyboard has been paired with your device.

### Unable to Charge Keyboard

1. Identify if the USB power cable is connected properly to the keyboard and the power source.
2. Check of the wall charger has plugged into power outlet.

## USAGE TIPS

1. Do not place any heavy objects on top of the key board.
2. Do not knock or dismantle the keyboard.

3. Keep the keyboard away from oil, chemicals, and organic liquids.
4. Clean the keyboard with the water, alcohol, or an alcohol-based disinfectant.
5. Dispose of batteries according to local laws.

## TECHNICAL SUPPORT

For technical questions, please visit:

[www.medgestore.com/about/contact/](http://www.medgestore.com/about/contact/)

877-MEDGE-43 or 877-633-4343

## REGULATORY COMPLIANCE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions. (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

## FCC STATEMENT

### Tested to Comply

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does not cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interfere by one or more of the following measures:

- Reorient or relocate the receiving antenna;
- Increase the separation between the equipment and receiver;
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected;
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not authorized by the party responsible for compliance could void the user's authority to operate this product.

Compliance with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50 dated June 24, 2007.

## BATTERY WARNING

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

## RF EXPOSURE WARNING

The equipment complies with FCC RF exposure limits set forth for an uncontrolled environment.

The equipment must not be co-located or operating in conjunction with any other antenna or transmitter.





 **MEDGESTORE.COM**